

Lecture #5 More About MHD Waves


Haus ①

I. Review

At last time, we linearized the MHD equations, assumed plane wave (Favier) Solutions, and solved to obtain the MHD Dispersion Relation:

$$(c\omega^2 - k^2 \cos^2 \theta V_A^2) [c\omega^4 - \omega^2 k^2 (c_s^2 + V_A^2) + k^4 \cos^2 \theta c_s^2 V_A^2] = 0$$

where

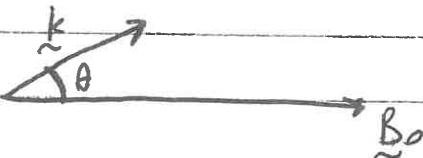

$$\underline{B}_0 \cdot \underline{k} = B_0 k \cos \theta$$


B. Three Wave Modes:

1. Alfvén Waves: a. $c\omega^2 = k_{||}^2 V_A^2$

b. Motion out of the plane defined by \underline{B}_0 , \underline{k}

c. Incompressible

d. Rescoring Force: Magnetic Tension alone

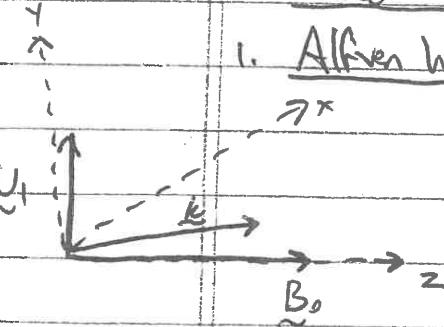

2. Fast Waves: a. $\frac{c\omega^2}{k^2} = \frac{1}{2}(c_s^2 + V_A^2) + \frac{1}{2}\sqrt{(c_s^2 + V_A^2)^2 - 4c_s^2 V_A^2 \cos^2 \theta}$

b. Motion in the plane of \underline{B}_0 and \underline{k}

c. Compressible (usually)

d. Rescoring Force: is Thermal and Magnetic Pressure Add!

(i) Magnetic Tension

3. Slow Waves: a. $\frac{c\omega^2}{k^2} = \frac{1}{2}(c_s^2 + V_A^2) - \frac{1}{2}\sqrt{(c_s^2 + V_A^2)^2 - 4c_s^2 V_A^2 \cos^2 \theta}$

b. Motion in the plane of \underline{B}_0 and \underline{k}

c. Compressible

d. Rescoring Force is Thermal and Magnetic Pressure Subtract!

(ii) Magnetic Tension

Lecture #5 (Continued)

Haves ③

II. Polar Plot of MHD Wave Phase Speeds:

A. Dimensionless Version of MHD Dispersion Relation

1. Take $k_{\parallel} = k \cos \theta$ and $k_{\perp} = k \sin \theta$,

2. Normalize by dividing by c_{ci} :

$$\left(\frac{\omega^2}{c_{ci}^2} - k_{\parallel}^2 \frac{V_A^2}{c_{ci}^2} \right) \left[\frac{\tilde{\omega}^4}{c_{ci}^4} - \frac{\omega^2}{c_{ci}^2} (k_{\perp}^2 + k_{\parallel}^2) \frac{V_A^2}{c_{ci}^2} \left(1 + \frac{c_s^2}{V_A^2} \right) + k_{\parallel}^2 (k_{\perp}^2 k_{\parallel}^2) \frac{V_A^4}{c_{ci}^4} \frac{c_s^2}{V_A^2} \right] = 0$$

3. NOTE: a. Let $\tilde{\omega} = \frac{\omega}{c_{ci}}$

b. $\frac{V_A^2}{c_{ci}^2} = \frac{\frac{B_0^2}{\mu_0 \rho_0}}{\left(\frac{q_i^2 B_0^2}{m_i^2} \right)} = \frac{1}{\mu_0} \left(\frac{e_0 m_i}{\pi \rho_0 q_i^2} \right) = \frac{c^2}{c_{pi}^2} \Rightarrow$ This is the ion inertial length.

DEFINE: $d_i = \frac{c}{c_{pi}} = \frac{V_A}{c_{ci}}$

c. $\frac{c_s^2}{V_A^2} = \left(\frac{\gamma \rho_0}{\rho_0} \right) \left(\frac{M_p c^2}{B_0^2} \right) = \frac{\gamma}{2} \frac{2 \mu_0 \rho_0}{B_0^2} = \frac{\gamma}{2} \beta \leftarrow$ Plasma β :
 = Thermal Press / Magnetic Press.

$$\beta \equiv \frac{2 \mu_0 \rho_0}{B_0^2}$$

d. Thus,

$$(\tilde{\omega}^2 - k_{\parallel}^2 d_i^2) \left[\tilde{\omega}^4 - \tilde{\omega}^2 (k_{\perp}^2 + k_{\parallel}^2 d_i^2) \left(1 + \frac{\gamma}{2} \beta \right) + k_{\parallel}^2 d_i^2 (k_{\perp}^2 + k_{\parallel}^2 d_i^2) \frac{\gamma}{2} \beta \right] = 0$$

5. There are only three parameters (dimensionless) which $\tilde{\omega}$ depends on:

$$\tilde{\omega} = \tilde{\omega}_{MHD} (k_{\perp} d_i, k_{\parallel} d_i, \beta)$$

a. Two define the parallel & perpendicular components of the wavevector.
 (this is characteristic of most dispersion relations)

b. Only one other dimensionless parameter: $\boxed{\beta}$

6. NOTE: $a. d_i = \frac{r_i}{\sqrt{\beta_i}}$

where $\beta_i = \frac{2 \mu_0 \rho_i}{B_0^2} = \frac{\beta}{2}$ for $T_i = T_e$ (true for MHD)

b. Thus, we could write $\tilde{\omega} = \tilde{\omega}_{MHD} (k_{\perp} r_i, k_{\parallel} r_i, \beta_i)$

Lecture #5 (Continued)

II. A (Continued)

7. Validity of MHD Approximation:

a. Remember $r_{Li} \ll L$, so if $L \sim \frac{1}{k}$, this means $k r_{Li} \ll 1$

b. Also i. $V_0 = \frac{L}{T} \rightarrow r_{Li} \ll L = T V_0$

ii. For $V_0 \sim V_{ci}$ and using $r_{Li} = \frac{V_{ci}}{\omega_{ci}}$, we get $\frac{V_{ci}}{\omega_{ci}} \ll T V_0$

iii. Take $c\omega \sim \frac{1}{T}$, giving us $\boxed{c\omega \ll \omega_{ci}}$

c. Thus $\tilde{\omega} = \tilde{\omega}_{MHD}(k_{\perp} r_{Li}, k_{\parallel} r_{Li}, \beta_i)$ is valid when $\tilde{\omega} \ll 1$

$k_{\perp} r_{Li}, k_{\parallel} r_{Li} \ll 1$.

B. Limits of $\frac{\omega}{k}$ at $\theta = 0$:

i. Phase velocity $V_p = \frac{\omega}{k}$ for waves at $\theta = 0$

When $C_s^2 > V_A^2$:

Fast

$$\frac{\omega}{k} = C_s^2$$

Alfven

$$\frac{\omega}{k} = V_A^2$$

Slow

$$\frac{\omega}{k} = V_A^2$$


$$\frac{\omega}{k} = V_A^2$$

$$\frac{\omega}{k} = V_A^2$$


$$\frac{\omega}{k} = C_s^2$$

When $C_s^2 < V_A^2$:


C. Polar Plots of $\frac{\omega}{k}$:



$$C_s^2 > V_A^2$$

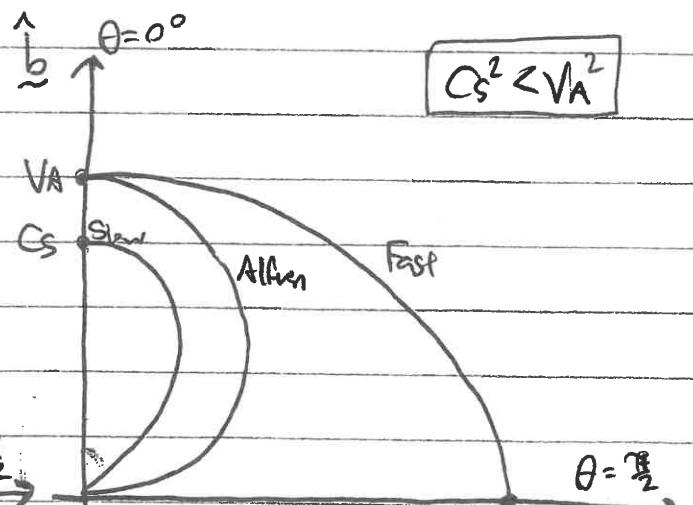

$$C_s^2 < V_A^2$$



$\frac{\omega}{k}$ is radius

$$\frac{\gamma}{2}\beta > 1$$

HIGH BETA

$$\sqrt{C_s^2 + V_A^2}$$

$$\frac{\gamma}{2}\beta < 1$$

LOW BETA

$$\sqrt{C_s^2 + V_A^2}$$

Homework 3

III. Conservation of Energy in Ideal MHD:

A.1. The ^{Total} MHD Equations can be manipulated to give a law for the Conservation of Energy: ~~Conservation~~

$$\frac{\partial}{\partial t} \left(\underbrace{\frac{1}{2} \rho U^2}_{\text{Kinetic Energy}} + \underbrace{\frac{P}{\gamma - 1}}_{\text{Internal (Thermal) Energy}} + \underbrace{\frac{B^2}{2 \mu_0}}_{\text{Magnetic Energy}} \right) + \nabla \cdot \left(\underbrace{\frac{1}{2} \rho U^2 \mathbf{U}}_{\text{Flux of Kinetic Energy}} + \underbrace{\frac{\gamma P}{\gamma - 1} \mathbf{U}}_{\text{Enthalpy Flux}} + \underbrace{\frac{1}{\mu_0} \mathbf{E} \times \mathbf{B}}_{\text{Pointing Flux}} \right) = 0$$

Internal Energy
(Thermal)
Kinetic Energy

Magnetic Energy

Flux of Kinetic Energy

Enthalpy Flux

Pointing Flux

2a. Integrating over all space, the volume integral of 2nd term can be converted to a surface integral by divergence theorem.

b. For surface at infinity, you get NRL p.5 (28)

$$\frac{dE}{dt} = 0$$

with

$$E = \frac{1}{2} \rho U^2 + \frac{P}{\gamma - 1} + \frac{B^2}{2 \mu_0}$$

Conserved Energy in Ideal MHD.

IV. The Entropy Mode:

- A.1. The MHD Equations give 8 equations for 8 unknowns: ρ, U, B, P .
2. But, we found only 6 solutions \Rightarrow the dispersion relation.
 3. In fact, a more careful analysis give two rays with $\omega = 0$. What do these rays correspond to?

B. Divergencelessness of B :

1. Remember, we must always satisfy $\nabla \cdot \mathbf{B} = 0$, so there is really an additional constraint, so we only have 7 unknowns, and thus seven solutions.

C. The Entropy Mode:

1. We define DEF: Specific Entropy

$$S = C \frac{P}{\rho^\gamma}$$

where C is some constant.

Lecture #5 (Continued)

IVc (Continued)

Hawes (5)

2. Thus, the Adiabatic Equation of State is $\frac{dS}{dt} = 0$,

\Rightarrow Thus, entropy is conserved by these adiabatic fluctuations.

3. If we consider fluctuations, $p = p_0 + p_1$

$$S = S_0 + S_1, \text{ etc.}$$

b. The other $\omega=0$ mode is a zero frequency entropy mode,

$S_1 \neq 0$, but $p_1 = 0$ (and so are $U_1 = 0$ & $B_1 = 0$).

4. Consider the ideal gas law: $pV = NkT$, or $p = nkT = \frac{\rho kT}{m}$

a. We can have $p_1 = 0$ if $\rho_1 T_1 = \text{const.}$

b. Thus density & temperature can vary to give constant pressure, $p_1 = 0$.

5. The existence of the (dft-neglected) Entropy mode

Should we be forgotten

6. There are \geq 7 solutions to ideal MHD dispersion relation

a. Six waves (\pm Fast, \pm Alfvén, \pm Slow)

b. One zero-frequency entropy mode

V. Eigenfunctions of the MHD Eigenmodes

A. How do we determine eigenfunctions (ρ_0, U_0, B_0, p_0) for a given wave mode?

1. We must go back to the simplified matrix equation for MHD.

2. Choose a value for one component.

3. Solve for all other quantities.

Lecture #5 (Continued)

V. (Continued)

Hawes ⑥

B. Examples: Eigenfunctions for $k_{11} = k_1 = k_0$ ($\theta = 45^\circ$)

1. In this case, the vector equation for \mathbf{U} is

$$\begin{pmatrix} \omega^2 - k_0^2(c_s^2 + v_A^2) & 0 & -k_0^2 c_s^2 \\ 0 & \omega^2 - k_0^2 v_A^2 & 0 \\ -k_0^2 c_s^2 & 0 & \omega^2 - k_0^2 c_s^2 \end{pmatrix} \begin{pmatrix} U_x \\ U_y \\ U_z \end{pmatrix} = 0$$

2. As clear above, U_y is decoupled from U_x and U_z .

3. Let's find the fast/slow wave eigenfunction for $U_x = U_0$

a.

$$\begin{pmatrix} \omega^2 - k_0^2(c_s^2 + v_A^2) & -k_0^2 c_s^2 \\ -k_0^2 c_s^2 & \omega^2 - k_0^2 c_s^2 \end{pmatrix} \begin{pmatrix} U_x \\ U_z \end{pmatrix} = 0 \quad (\text{Take } U_y = 0)$$

b. I can use either equation to solve for U_z as a func of U_x .

$$-k_0^2 c_s^2 U_x + (\omega^2 - k_0^2 c_s^2) U_z = 0$$

$$\Rightarrow U_z = \frac{k_0^2 c_s^2}{\omega^2 - k_0^2 c_s^2} U_x \quad U_x = U_0.$$

c. Here, for the fast/slow

$$\omega^2 = \frac{1}{2} k_0^2 (c_s^2 + v_A^2) \pm \frac{k_0^2}{2} \sqrt{(c_s^2 + v_A^2)^2 - 2c_s^2 v_A^2} = \frac{1}{2} k_0^2 (c_s^2 + v_A^2) [1 \pm$$

i) Note: ~~$c_s^2 + v_A^2 \approx 2c_s^2$~~ $\sqrt{1 - \frac{2c_s^2 v_A^2}{(c_s^2 + v_A^2)^2}}$

$\omega^2 = k_0^2 \frac{1}{2} (c_s^2 + v_A^2) \left[1 \pm \sqrt{1 - \frac{2c_s^2 v_A^2}{(c_s^2 + v_A^2)^2}} \right]$

+ \Rightarrow Fast
- \Rightarrow Slow

4. Find density perturbation: $\omega p_1 = p_0 (\mathbf{k} \cdot \mathbf{U}_1) = p_0 (k_0 U_x + k_0 U_z)$

$$\Rightarrow p_1 = p_0 \frac{k_0}{c_s} (U_x + U_z) = p_0 \frac{k_0}{c_s} \left(U_0 + \frac{k_0^2 c_s^2}{\omega^2 - k_0^2 c_s^2} U_0 \right) = p_0 \frac{k_0}{c_s} \frac{\omega^2}{\omega^2 - k_0^2 c_s^2} U_0$$

$$P_1 = P_0 \frac{\omega k_0}{\omega^2 - k_0^2 c_s^2} U_0$$

Lecture #5 (Continued)

IV.B. (Continued)

5. Similarly

$$P_1 = \gamma p_0 \frac{\omega k_0}{\omega^2 - k_0^2 c_s^2} U_0$$

Hawest?

6. Magnetic Field: $\omega \underline{B}_1 = \underline{B}_0 (\underline{k} \cdot \underline{U}_1) - (\underline{B}_0 \cdot \underline{k}) \underline{U}_1$

a. $\omega B_x = -B_0 k_0 U_x$

b. $\omega B_z = B_0 (k_0 U_x + k_0 U_z) - B_0 k_0 U_z = B_0 k_0 U_x$

c. Thus

$$\begin{aligned} B_x &= B_0 \frac{k_0}{\omega} U_x \\ B_z &= B_0 \frac{k_0}{\omega} U_z \end{aligned}$$

d. NOTE: $\nabla \cdot \underline{B} \Rightarrow \underline{k} \cdot \underline{B}_1 = k_0 B_x + k_0 B_z = k_0 (-B_0 \frac{k_0}{\omega} U_x + B_0 \frac{k_0}{\omega} U_z) = 0$

7. Thus, for the fast/^{slow} wave with $\underline{k} = k_0 \hat{x} + k_0 \hat{z}$, we get

$$P_1 = P_0 \frac{\omega k_0}{\omega^2 - k_0^2 c_s^2} U_0$$

$$P_1 = \gamma p_0 \frac{\omega k_0}{\omega^2 - k_0^2 c_s^2} U_0$$

$$U_x = U_0$$

$$U_y = 0$$

$$U_z = \frac{k_0^2 c_s^2}{\omega^2 - k_0^2 c_s^2} U_0$$

$$B_x = -B_0 \frac{k_0}{\omega} U_0$$

$$B_z = B_0 \frac{k_0}{\omega} U_0$$

8. Let's look at the real pressure term for fast/slow wave in the simple case $c_s^2 = V_A^2$.

Lecture #5 (Continued)

Hawes (8)

IV B. (Continued)

$$q_a = \frac{1}{\rho_0} \nabla \left(p + \frac{\beta^2}{2M_0} \right) \Rightarrow k \left(\frac{p_1}{\rho_0} + \frac{B_0 B_1}{M_0 \rho_0} \right)$$

b. Since $K = k_0 \hat{x} + k_0 \hat{z}$, both components of pressure force are same.

$$= k_0 \left[\frac{\partial p}{\rho_0} \frac{\omega^2}{\omega^2 - k_0^2 c_s^2} \frac{k_0 U_0}{\omega} + \frac{B_0 (B_0 \frac{k_0 U_0}{\omega})}{M_0 \beta} \right] = k_0 \left[C_s^2 \frac{\omega^2}{\omega^2 - k_0^2 c_s^2} + M_0^2 \frac{k_0 U_0}{\omega} \right]$$

$$c. \text{ For } c_s^2 = V_A^2, \quad \omega^2 = \frac{k_0^2}{2} (2c_s^2) \left[1 \pm \sqrt{1 - \frac{2c_s^4}{(2c_s^2)^2}} \right] = k_0^2 c_s^2 \left(1 \pm \sqrt{\frac{1}{2}} \right)$$

$$d. = \frac{k_0^2 c_s^2}{\omega} U_0 \left[\frac{\omega^2}{\omega^2 - k_0^2 c_s^2} + 1 \right]$$

$$e. \text{ NOTE: } \omega^2 - k_0 c_s^2 = k_0^2 c_s^2 \left[\left(1 \pm \sqrt{\frac{1}{2}} \right) - 1 \right] = \pm k_0^2 c_s^2 \sqrt{\frac{1}{2}}$$

$$f. \text{ Thus, } = \frac{k_0^2 c_s^2 U_0}{\omega} \left[\frac{k_0^2 c_s^2 \left(1 \pm \sqrt{\frac{1}{2}} \right)}{\pm k_0^2 c_s^2 \sqrt{\frac{1}{2}}} + 1 \right] = \frac{k_0^2 c_s^2}{k_0^2 c_s^2 \left(1 \pm \sqrt{\frac{1}{2}} \right)} \omega U_0 \left[\pm \left(\sqrt{2} \mp 1 \right) + 1 \right]$$

$$= \frac{\omega U_0}{\left(1 \pm \sqrt{\frac{1}{2}} \right)} (2 \pm \sqrt{2}) = \frac{\omega U_0 2 \left(1 \pm \sqrt{\frac{1}{2}} \right)}{1 \pm \sqrt{2}} = 2 \omega U_0 = 2 k_0 c_s \sqrt{1 \pm \frac{1}{2}} U_0$$

g. Thus, the pressure force is

$$= \begin{cases} (4 + 2\sqrt{2})^{\frac{1}{2}} k_0 c_s U_0 & \text{Fast} \\ (4 - 2\sqrt{2})^{\frac{1}{2}} k_0 c_s U_0 & \text{Slow} \end{cases} \quad \omega = k_0 c_s \sqrt{1 \pm \frac{1}{2}}$$