

029:195

Lecture #8 Normal Mode Analysis and the Energy Principle Howes ①

I. Properties of the Linear Force Operator

A. Review

1. Last time we derived the Linear Force Operator for small displacements $\tilde{\xi}$.

$$\rho_0 \frac{\partial^2 \tilde{\xi}_1}{\partial t^2} = F(\tilde{\xi}_1) \quad \text{where}$$

$$F(\tilde{\xi}_1) = \nabla[\tilde{\xi}_1 \cdot \nabla p_0 + \gamma p_0 \nabla \cdot \tilde{\xi}_1] + \frac{(\nabla \times B_0) \times [\nabla \times (\tilde{\xi}_1 \times B_0)]}{\mu_0} + \frac{(\nabla \times [\nabla \times (\tilde{\xi}_1 \times B_0)]) \times B_0}{\mu_0}$$

2. Also, recall the conserved energy in Ideal MHD:

$$E = S d^3 \tilde{\xi} \left[\frac{1}{2} \rho U^2 + \frac{P}{\gamma - 1} + \frac{B_0^2}{2 \mu_0} \right]$$

B. Expansion of MHD Energy in orders of $\tilde{\xi}_1$

1. Just as we did for the simple mechanical system in I.B. of Lecture #7, we can split the MHD conserved energy into orders of $\tilde{\xi}_1$.

$$O(\tilde{\xi}_1^0) \quad E_0 = S d^3 \tilde{\xi} \left[\frac{P_0}{\gamma - 1} + \frac{B_0^2}{2 \mu_0} \right]$$

$$O(1/\tilde{\xi}_1) \quad E_1 = S d^3 \tilde{\xi} \tilde{\xi}_1 \cdot \left[\nabla p_0 - \frac{(\nabla \times B_0) \times B_0}{\mu_0} \right] \quad \begin{matrix} \text{(This } [\tilde{\xi}_1 = 0 \text{ in MHD}) \\ \text{equilibrium} \end{matrix}$$

$$O(1/\tilde{\xi}_1^2) \quad E_2 = S d^3 \tilde{\xi} \underbrace{\left[\frac{1}{2} \rho_0 \left| \frac{\partial \tilde{\xi}_1}{\partial t} \right|^2 \right]}_{\text{Kinetic Energy}} + \underbrace{SW(\tilde{\xi}_1, \tilde{\xi}_1)}_{\text{Potential Energy}}$$

We'll derive form of SW soon.

C. Self-Adjoint Property

1. We can differentiate E_2 in time to determine a form of SW:

$$\frac{\partial E_2}{\partial t} = S d^3 \tilde{\xi} \frac{\partial}{\partial t} \left[\frac{1}{2} \rho_0 \left| \frac{\partial \tilde{\xi}_1}{\partial t} \right|^2 \right] + \frac{\partial}{\partial t} [SW(\tilde{\xi}_1, \tilde{\xi}_1)]$$

a. NOTE: $\frac{\partial}{\partial t} \left[\frac{1}{2} \rho_0 \left| \frac{\partial \tilde{\xi}_1}{\partial t} \right|^2 \right] = \rho_0 \frac{\partial \tilde{\xi}_1}{\partial t} \cdot \frac{\partial^2 \tilde{\xi}_1}{\partial t^2}$

Lesson #8 (Continued)

I. C.I. (Continued)

Hawes ②

b. NOTE: $\frac{\partial}{\partial t} [SW(\underline{\xi}_1, \underline{\xi})] = SW\left(\frac{\partial \underline{\xi}}{\partial t}, \underline{\xi}_1\right) + SW\left(\underline{\xi}_1, \frac{\partial \underline{\xi}}{\partial t}\right)$

2. But, Conservation of energy implies $\frac{\partial E_2}{\partial t} = 0$, so

$$\int d^3x \frac{\partial \underline{\xi}}{\partial t} \cdot \underline{F}(\underline{\xi}_1) = - \left[SW\left(\frac{\partial \underline{\xi}}{\partial t}, \underline{\xi}_1\right) + SW\left(\underline{\xi}_1, \frac{\partial \underline{\xi}}{\partial t}\right) \right]$$

where we have used $\rho_0 \frac{\partial^2 \underline{\xi}_1}{\partial t^2} = \underline{F}(\underline{\xi}_1)$

3. This statement must be true at $t=0$ when I can choose $\underline{\xi}_1$ and $\frac{\partial \underline{\xi}_1}{\partial t}$ arbitrarily as initial conditions.

⇒ Therefore, it must be true for any chosen vectors $\underline{\xi}_1$ and $\underline{\eta}_1 = \left(\frac{\partial \underline{\xi}_1}{\partial t}\right)$.

$$\int d^3x \underline{\eta}_1 \cdot \underline{F}(\underline{\xi}_1) = - \left[SW(\underline{\eta}_1, \underline{\xi}_1) + SW(\underline{\xi}_1, \underline{\eta}_1) \right]$$

4. This statement is clearly symmetric under exchange of $\underline{\xi}_1$ and $\underline{\eta}_1$, so

$$\int d^3x \underline{\eta}_1 \cdot \underline{F}(\underline{\xi}_1) = \int d^3x \underline{\xi}_1 \cdot \underline{F}(\underline{\eta}_1)$$

The Linear Force Operator \underline{F} is self-adjoint!

D. Form for $SW(\underline{\xi}_1, \underline{\xi}_1)$

1. The property above suggests the following form for SW :

$$SW = -\frac{1}{2} \int d^3x \underline{\xi} \cdot \underline{F}(\underline{\xi})$$

NOTE: From this point on, $\underline{\xi}$ is understood to be the linearized displacement, so I drop the subscript "1".

I. Normal Mode Analysis:

A. Representation as a Superposition of Normal Modes

i. An arbitrary mode has displacement $\tilde{\xi}_n(x, t)$, which satisfies $\rho \frac{\partial^2 \tilde{\xi}_n}{\partial t^2} = F(\tilde{\xi}_n)$

a. F is a time-independent linear operator on $\tilde{\xi}_n(x, t)$, so we can separate space & time dependence parts

$$\tilde{\xi}_n(x, t) = \tilde{\xi}_n(x) e^{-i\omega_n t}$$

where we assume a simple-harmonic form for time dependence.

b. Thus, we find

$$-\rho \omega_n^2 \tilde{\xi}_n(x) = F[\tilde{\xi}_n(x)]$$

c. The general solution for an arbitrary $\tilde{\xi}(x, t)$ is the sum of normal modes

$$\tilde{\xi}(x, t) = \sum_n \tilde{\xi}_n(x) e^{-i\omega_n t}$$

B. Properties of Normal Modes

i. Property I: ω_n^2 is always real.

Proof: a. Consider the complex conjugate of the equation of motion

$$-\rho \omega_n^2 * \tilde{\xi}_n^*(x) = F(\tilde{\xi}_n^*)$$

b. Dot with $\tilde{\xi}_n$ and integrate over volume $\int d^3x$ By self-adjoint property.

$$\begin{aligned} -\rho \omega_n^2 * \int d^3x |\tilde{\xi}_n|^2 &= \int d^3x \tilde{\xi}_n * F(\tilde{\xi}_n) = \int d^3x \tilde{\xi}_n^* * F(\tilde{\xi}_n) \\ &= -\rho \omega_n^2 \int d^3x |\tilde{\xi}_n|^2 \end{aligned}$$

c. For $|\tilde{\xi}_n|^2$ non-zero, this leads to

$$\omega_n^{2*} = \omega_n^2 \Rightarrow \omega_n^2 \text{ is always real}$$


Lecture #8 (Continued)

Haves ④


II. B. (Continued)

2. Implications of Property I:


- a. For $\omega_n^2 > 0$, ω_n is purely real and eigenfunction is oscillatory. \Rightarrow STABLE

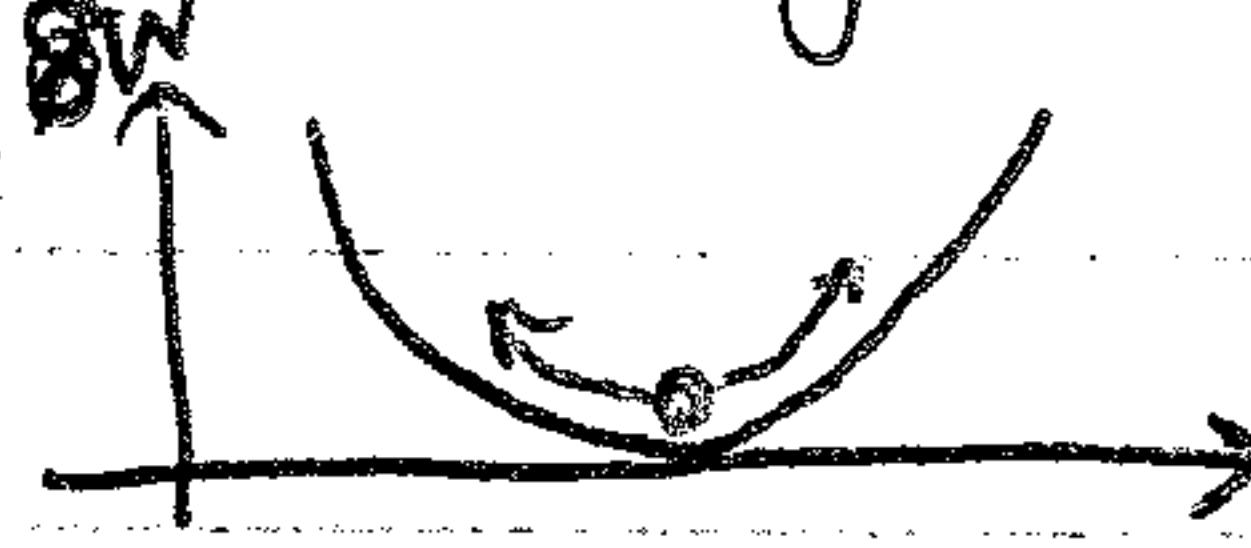

- b. For $\omega_n^2 < 0$, ω_n is purely imaginary and eigenfunction undergoes exponential growth due to one root.
 \Rightarrow UNSTABLE

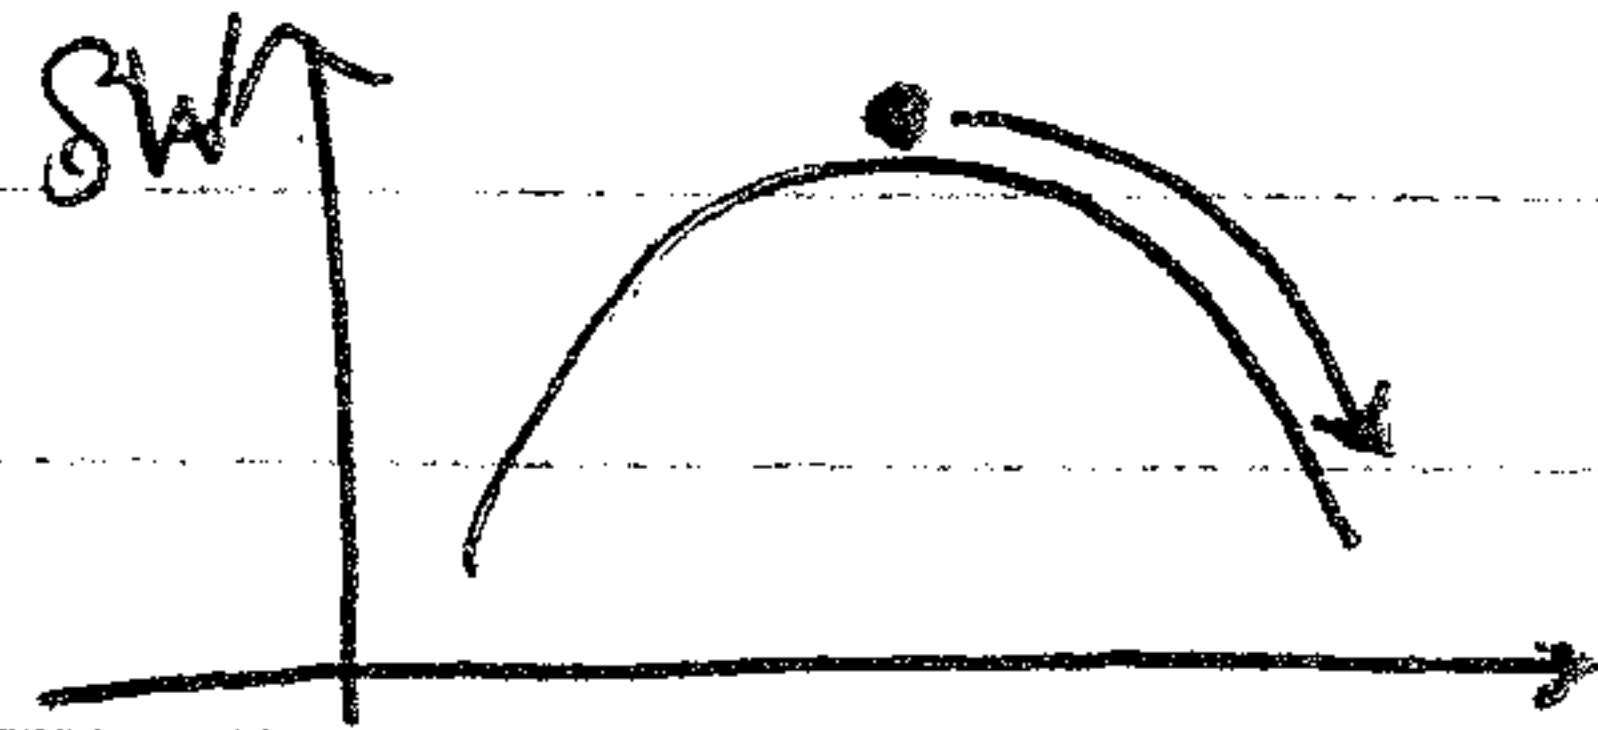

- c. Numerical Simplification: In solving for roots of the equation of motion (i.e. finding the frequency of the normal mode), one need only look for real ω^2 and need not search all of complex ω^2 space.

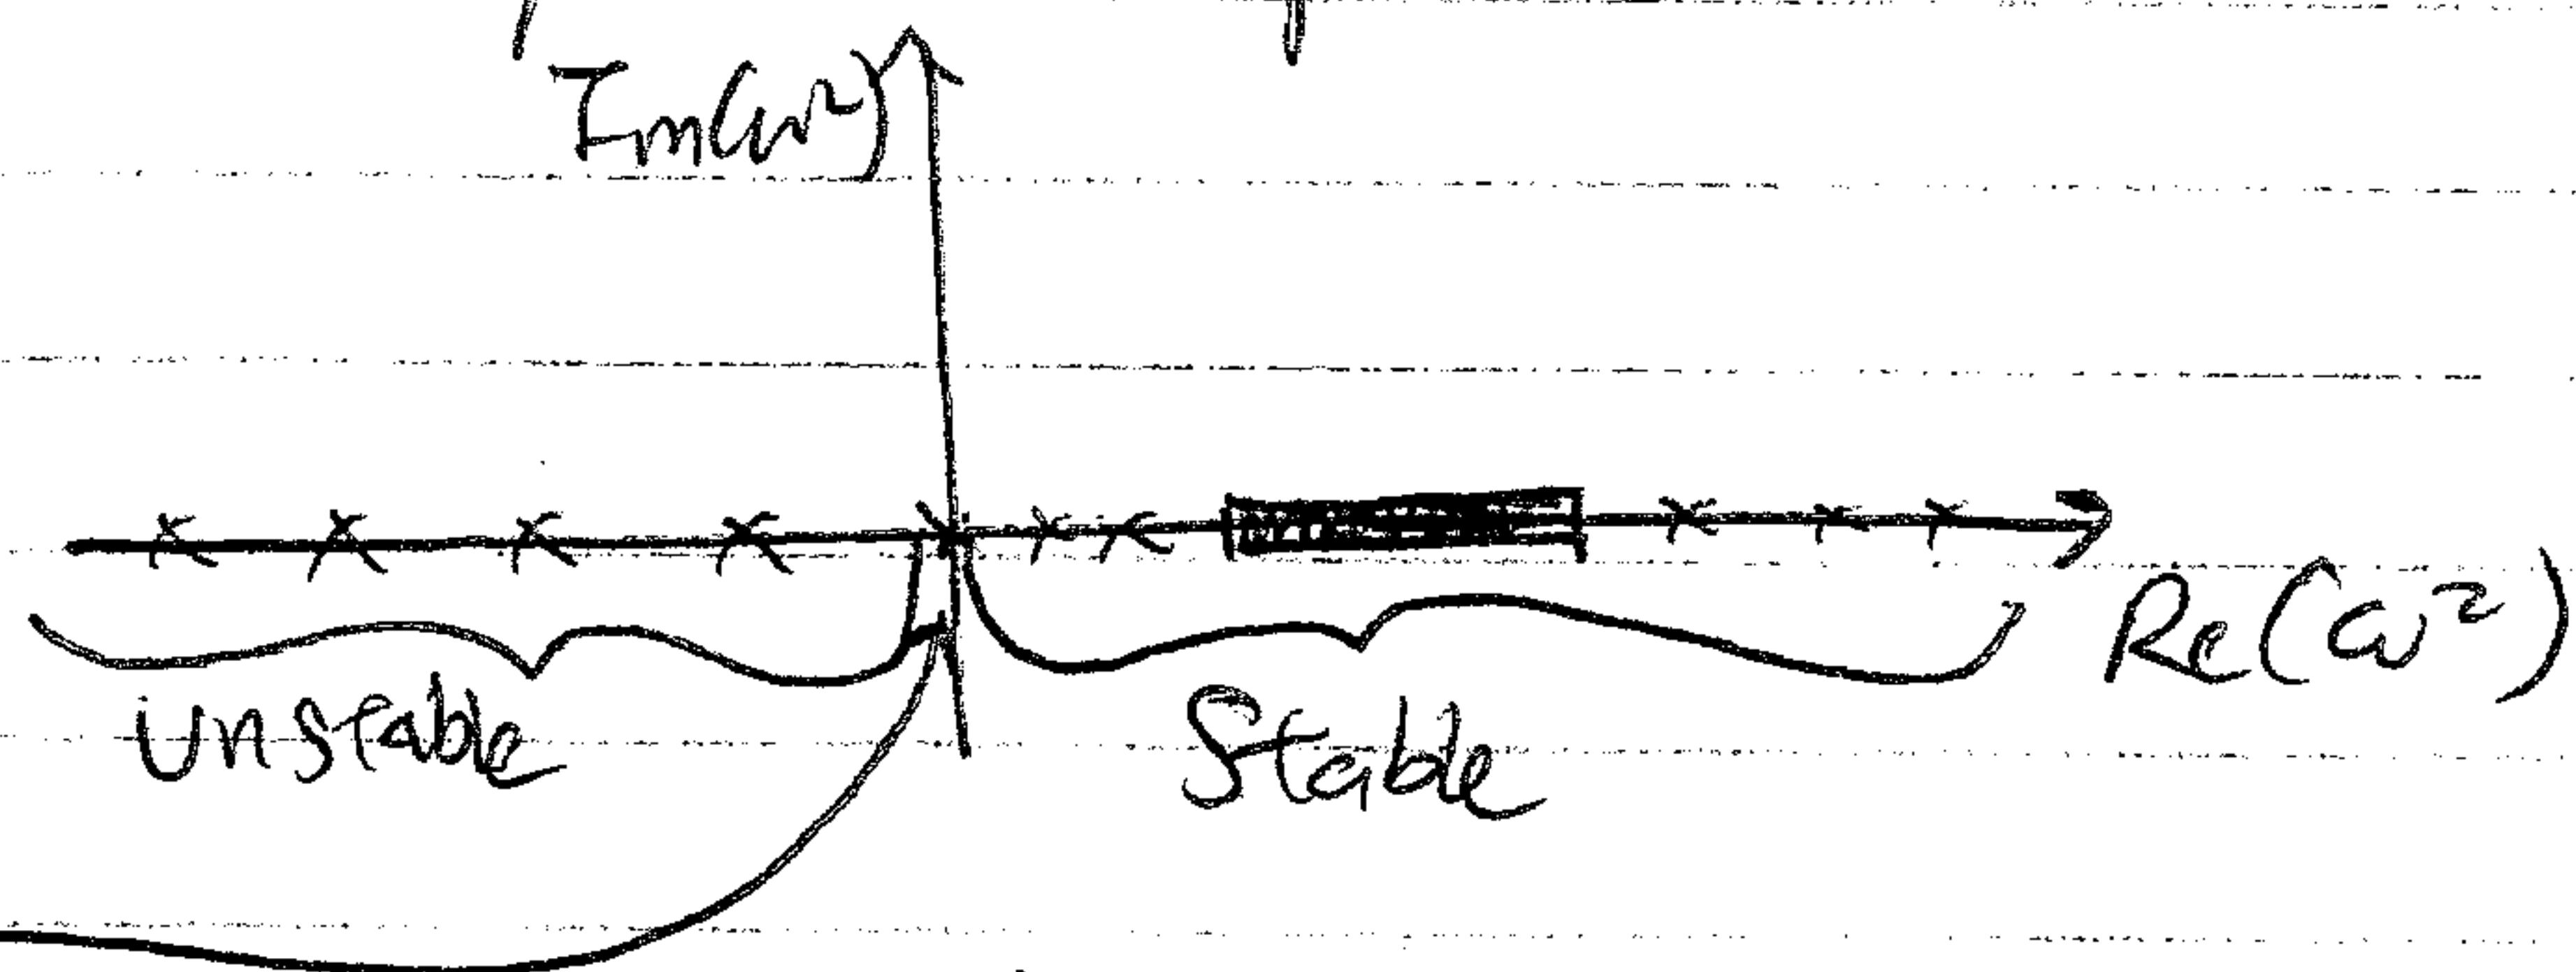

- d. $\omega_n^2 = 0$ is the point of marginal stability separating stable from unstable solutions.

3. Property II: The eigenmodes of \mathcal{L} are orthonormal,

$$\int d^3x \rho_0 \tilde{\xi}_m^* \cdot \tilde{\xi}_n = \delta_{mn}.$$

(See Gurnee & Bhattacharjee for proof).
sec 6.7.4

Lecture 18 (Continued)

I. (Continued)

Hines 5

C. General Procedure for Solution by Normal Mode Analysis

- 1.a. The procedure is analogous to the solution of the linear dispersion relation for a given system.
- 1.b. Of course, we take the homogeneous, ~~initial~~ conditions to use the equilibrium solutions for $\rho_0(\mathbf{x})$, $\mathbf{B}_0(\mathbf{x})$.
- c. Also, unlike MHD waves in a homogeneous plasma, sources of free energy are present so we may find many unstable eigenmodes (with ω purely imaginary).
- d. In fact, stability is more often the exception than the rule.

2.a. Begin with $\rho_0 \frac{\partial^2 \xi}{\partial t^2} = \underline{F}(\xi) \Rightarrow -\rho_0 \omega_n^2 \underline{\xi}_n = \underline{F}(\underline{\xi}_n)$

- b. For many systems, we can simplify $\underline{F}(\xi)$ because some of the terms are zero.

- c. ~~This is a consequence of~~ Symmetries of the system can be used to reduce at least some components of the vector operators in $\underline{F}(\xi)$ to algebraic operations (For periodicity, we can use a Fourier decomposition)

- d. The vector equation yields a 3×3 matrix equation which can be solved for the eigenfrequencies ω_n .

- 3.a. This method yields frequencies or unstable growth rates for each mode, and can be used to reconstruct the eigenfunctions.

- b. The somewhat complicated normal mode analysis often gives us more information than we need.

- c. Often, we care only if a system is unstable.

\Rightarrow The Energy Principle is a more easily applied, yet extremely powerful, technique that determines stability.

III. The Energy Principle

A. Necessary and Sufficient Conditions for Stability

1. Instability is relatively easy to prove:

a. Choose a physically motivated perturbation ξ

b. Show that this perturbation leads to $\delta W < 0$.

2. Stability is much more difficult to prove

a. Must show that no perturbation can lead to $\delta W < 0$

b. Using the energy principle, one may minimize δW with respect to all possible perturbations

c. If δW_{\min} is positive, the system is stable.

$$3. \text{ Remember } E_2 = \underbrace{Sd^3x \left[\frac{1}{2} \rho_0 \left(\frac{\partial \xi}{\partial t} \right)^2 \right]}_{=SK} + \delta W(\xi, \dot{\xi}) = \text{constant}$$

So $E_2 = SK + \delta W$. Also, by definition, $SK \geq 0$

4. Theorem I: If $\delta W \geq 0$ for all ξ then the system is stable.

$\Rightarrow \delta W \geq 0$ for all ξ is sufficient for stability

Proof: a. If $\delta W \geq 0$,

$$0 \leq SK = E_2 - \delta W \leq E_2$$

b. Thus SK is bounded from above. No unbounded growth of kinetic energy is possible so plasma is stable. QED.

5. Theorem II: If for some function ξ , $\delta W(\xi, \dot{\xi}) < 0$, then the system is unstable.

$\Rightarrow \delta W \geq 0$ for all ξ is also necessary for stability.

Lecture #8 (Continued)
III. A. 5. (Continued)

Howes ⑦

Practical. Consider a displacement initially such that

$$\underline{\xi}(x, 0) \neq 0 \quad \text{but} \quad \frac{\partial \underline{\xi}}{\partial t}(x, 0) = 0 \quad (\text{displaced but at rest}).$$

b. Let this $\underline{\xi}$ lead to $\delta W < 0$.

c. At time $t=0$, $E_2 = \cancel{8K} + \delta W < 0 \Rightarrow E_2 < 0$.

d. Define

$$I(t) = \frac{1}{2} \int d^3x \rho_0 |\underline{\xi}|^2$$

e. Then

$$\frac{d^2 I}{dt^2} = \frac{1}{2} \int d^3x \rho_0 \left[2 \left| \frac{\partial \underline{\xi}}{\partial t} \right|^2 + \underline{\xi}^* \cdot \frac{\partial^2 \underline{\xi}}{\partial t^2} + \underline{\xi} \cdot \frac{\partial^2 \underline{\xi}^*}{\partial t^2} \right]$$

$$= \frac{1}{2} \int d^3x \left[2 \rho_0 \left| \frac{\partial \underline{\xi}}{\partial t} \right|^2 + \underline{\xi}^* \cdot F(\underline{\xi}) + \underline{\xi} \cdot F(\underline{\xi}^*) \right]$$

$$= 2 \underline{\xi}^* \cdot F(\underline{\xi}) = -4 \delta W$$

f. Thus $\frac{d^2 I}{dt^2} = 2(8K - \delta W)$.

but $E_2 = 8K + \delta W$ so $\delta W = E_2 - 8K \Rightarrow \frac{d^2 I}{dt^2} = 2(28K - E_2)$

g. $8K \geq 0$, so let's take $8K = 0$. Then $\frac{d^2 I}{dt^2} = -2E_2 > 0$

because $E_2 < 0$.

h. Thus I increases without bound if $\delta W < 0 \Rightarrow \text{UNSTABLE. QED}$

~~REMEMBER~~

6. Thus $\delta W \geq 0$ for all $\underline{\xi}$ is a necessary and sufficient condition for stability.

B. Forms for δW :

i. We can use $\delta W = -\frac{1}{2} \int d^3x \underline{\xi} \cdot F(\underline{\xi})$ and linearize operator $F(\underline{\xi})$ to find useful forms for δW .

Lecture #8 (Continued)

III. B. (Continued)

Howes^⑧

2. After substantial algebra (See Greene & Bhattacharjee Sec 7.6), we arrive at the form:

$$\delta W = \frac{1}{2} \int d\mathbf{x} \left[\underbrace{\frac{|\nabla \times (\underline{\zeta} \times \underline{B}_0)|^2}{\mu_0}}_{\text{Magnetic Tension and compression}} + \gamma_{p0} |\nabla \cdot \underline{\zeta}|^2 - \underbrace{\underline{\zeta}^* \hat{J}_0 \times [\nabla \times (\underline{\zeta} \times \underline{B}_0)] - \underline{\zeta}^* \cdot \nabla (\underline{\zeta} \cdot \nabla p_0)}_{\text{"Kink" Drive or "Interchange" or "Ballooning" Drive}}$$

positive \Rightarrow stabilizing potentially destabilizing

3a. Since thermal compression term is always stabilizing, taking incompressible motions ($\gamma \rightarrow \infty$) are always more stable than compressible motions.

b. A ~~real~~ fluid with pressure independent of volume ($\gamma \rightarrow 0$) is the most unstable.

4. A more complete treatment of a finite volume plasma confined by vacuum magnetic fields includes surface terms and vacuum field energy terms in δW .

C. Application of Energy Principle to Evaluate Stability

1. One may calculate δW for a given equilibrium $p_0(\mathbf{x})$ and $B_0(\mathbf{x})$ for an arbitrary $\underline{\zeta}$

2. Eventually, one can minimize δW with respect to each component of $\underline{\zeta}$. For example, take $\frac{\partial \delta W}{\partial \zeta_x} = 0 \Leftrightarrow$

find the minimum δW at the solutions for ζ_x minima.

3. Ultimately, one reaches a final value δW_{\min} .

If $\delta W_{\min} < 0$, unstable. Otherwise stable.